

PERSONAL STATUS LIFE

Quality Sharing 品位生活。品质共享



通 风 设 备 系 列

Ventilation
Fan Series



地址：佛山市顺德区勒流镇江义工业区西横二路3号

Add: No.3, Xiheng 2nd Road, Jiangyi Industrial Zone, Leliu Town, Shunde District, Foshan City, Guangdong Province.

电话 Tel : 0086-757-25539620 23663014 23663015 传真 Fax : 0086-757-25539621

网址 Web : www.gdfeilu.com www.gdfeilu.cn.alibaba.com Http://sdfeilu.en.alibaba.com

E-mail : export1@gdfeilu.com kht0506@126.com export2@gdfeilu.com export3@gdfeilu.com sale2@gdfeilu.com

品位生活。品质共享

Personal Status Life Quality Sharing



功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
Three speed options
- 拉伸配前后铸铁花篮，铝牙箱，内配前后花篮（经防锈处理，更耐腐蚀）
Wrought iron crust motor housing with cast iron basket inside, with aluminum gear box and cast iron inside(rust prevention)
- 1.8mm线径，10mm间距 扁线自扣网罩
1.8mm wire diameter, and spacing 10mm clip type fastener grill
- 总长1.3米伸缩杆，配7公斤十字橡胶底座(5.5公斤可选)
Totally 1.3 meter adjustable pole, with 7kgs cross rubber base(5.5kgs is optional)
- 二铝叶
2 optimized aluminum blade
- 适合于空间较大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in larger factories, workshops, warehouses and hall, etc.
- 500mm/600mm/650mm/750mm
20" /24" / 26" /30"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



大功率电机
big power motor

技术参数 Technical parameters

规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
20"/500mm	110/220/380	1/3	50/60	100-135	1350	160	73
24"/600mm	110/220/380	1/3	50/60	140-180	1350	175	76
26"/650mm	110/220/380	1/3	50/60	160-200	1350	180	80
30"/750mm	110/220/380	1/3	50/60	200-260	1350	250	86

规格 Size	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
20"/500mm	16.5	18.5	57.5*18.5*80	300	658	800	580	1170	1470
24"/600mm	17.5	19.5	68.5*18.5*68.5	264	561	765	535	1085	1340
26"/650mm	18.5	20.5	74*18*72	275	530	670	480	960	1220
30"/750mm	19.5	21.5	81.7*18*81.7	220	425	536	420	850	1070



功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
Three speed options
- 60mm铸铁前壳，内配后花篮，铝牙箱（可选80mm铸铁前壳）
60mm cast iron front motor housing and cast iron inside, with aluminum gear box(80mm is alternative)
- 2.0mm线径，8mm间距 16支加强根国标扁线自扣网罩
2.0mm wire diameter, and spacing 8mm clip type fastener grill, 16 pieces of strengthen main net wire, applied to national standard.
- 总长1.3米伸缩杆，配6公斤十字拉伸铁底座
Totally 1.3 meter adjustable pole, with 6kgs cross wrought iron crust base
- 大角度三铝叶
Big-angle 3 optimized aluminum blade
- 适合于空间特大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in super ample factories, workshops, warehouses and hall, etc.
- 500mm/600mm/650mm/750mm
20" /24" /26" /30"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



大功率电机
big power motor

技术参数 Technical parameters

规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
20"/500mm	110/220/380	1/3	50/60	100-135	1350	160	73
24"/600mm	110/220/380	1/3	50/60	140-180	1350	175	76
26"/650mm	110/220/380	1/3	50/60	160-200	1350	180	80
30"/750mm	110/220/380	1/3	50/60	200-260	1350	250	86

规格 Size	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
20"/500mm	16.5	18.5	57.5*18.5*80	300	658	800	580	1170	1470
24"/600mm	17.5	19.5	68.5*18.5*68.5	264	561	765	535	1085	1340
26"/650mm	18.5	20.5	74*18*72	275	530	670	480	960	1220
30"/750mm	19.5	21.5	81.7*18*81.7	220	425	536	420	850	1070



水滴状 拉伸圆形机壳
配前后花篮
round wrought iron crust
motor housing



铝牙箱塑料齿轮
aluminum gear box
and plastic gear wheel



电木开关
bakelite switch



新款前网装饰环
grand new decorative
panel for front grill



1.8mm线径10mm间距
12根新款扁线自扣网
1.8mm wire diameter and
10mm wire spacing, 12 pcs,
new clip type fastener grill



1.3米伸缩杆
1.3m adjustable pole



7.5公斤新款圆形橡胶底座
7.5kgs new round
rubber base

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
Three speed options
- 圆形拉伸壳，内配前后花篮，铝牙箱
Round wrought iron crust motor housing and cast iron inside, with aluminum gear box
- 新款A-型1.8mm线径，10mm间距扁线自扣网罩
Latest A-type 1.8mm wire diameter and spacing 10mm clip type fastener grill.
- 总长1.3米伸缩杆，配7.5公斤新款圆形橡胶底座
Totally 1.3 meter adjustable pole, with 7.5kgs new round rubber base
- 三铝叶
3 optimized aluminum blade
- 适合于空间较大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in larger factories, workshops, warehouses and hall, etc.
- 500mm/600mm/650mm/750mm
20"/24"/26"/30"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



大功率电机
big power motor



新款方型电机配前后花篮
new type as square
motor housing



铝牙箱塑料齿轮
aluminum gear box
and plastic gear wheel




电木开关
bakelite switch



新款前网装饰环
grand new decorative
panel for front grill



大角度四铝叶
big-angle 4
aluminum blade



2.0mm线径10mm间距
12根新款扁线自扣网
2.0mm wire diameter and
10mm wire spacing, 12 pcs,
new clip type fastener grill



6公斤十字拉伸铁底
6 kgs cross wrought iron
crust base (iron cover
rubber inside)

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 四档调速
Four speed options
- 方形拉伸壳，内配前后花篮，铝牙箱
Square wrought iron crust motor housing and cast iron inside, with aluminum gear box
- 新款A-型2.0mm线径，10mm间距扁线自扣网罩
New A-type 2.0mm wire diameter, and spacing 10mm new type clip type fastener grill
- 总长1.3米伸缩杆，配6.0公斤十字拉伸铁底座
Totally 1.3 meter adjustable pole, with 6.0kgs cross wrought iron crust base
- 大角度四铝叶（专利号：201130410753.7）
Big-angle 4 aluminum blade, with patent (Patent NO.: 201130410753.7)
- 适合于空间特大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in super ample factories, workshops, warehouses and hall, etc.
- 500mm/650mm/750mm
20"/26"/30"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



大功率电机
big power motor



技术参数 Technical parameters

规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
20"/500mm	110/220/380	1/3	50/60	100-135	1350	160	73
24"/600mm	110/220/380	1/3	50/60	140-180	1350	175	76
26"/650mm	110/220/380	1/3	50/60	160-200	1350	180	80
30"/750mm	110/220/380	1/3	50/60	200-260	1350	250	86

规格 Size	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
20"/500mm	16.5	18.5	57.5*19*80	300	590	740	580	1170	1470
24"/600mm	17.5	19.5	68.5*18.5*68.5	264	561	765	535	1085	1340
26"/650mm	18.5	20.5	72*18*70	275	530	670	480	960	1220
30"/750mm	19.5	21.5	81.7*18*81.7	220	425	536	420	850	1070

技术参数 Technical parameters

规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
20"/500mm	110/220/380	1/3	50/60	100-135	1350	160	73
26"/650mm	110/220/380	1/3	50/60	160-200	1350	180	80
30"/750mm	110/220/380	1/3	50/60	200-260	1350	250	86

规格 Size	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
20"/500mm	16.5	18.5	57.5*18.5*80	300	590	740	580	1170	1470
26"/650mm	18.5	20.5	72*18*70	275	530	624	480	960	1220
30"/750mm	19.5	21.5	81.7*18*81.7	220	425	536	420	850	1070



新款带液晶显示屏电机
New design LCD screen
Motor

多功能遥控
Multifunctional
remote control

大角度四铝叶
Big angle
4 aluminum blade

2.0mm线径10mm间距
12根 金属商标牌扁线自扣网
2.0mm wire diameter and
10mm wire spacing ,12pcs ,
clip type fastener grill with
metal logo plate

6公斤十字拉伸底座
6 kgs cross wrought iron
crust base(iron cover
rubber inside)

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 19档调速
Nineteen speed options
- 新款液晶屏电机，带触控控制功能，并附带遥控
New-design LCD screen motor, with touch keys function and remote control
- 新款2.0mm线径扁线自扣网，10mm间距，金属商标牌
New 2.0mm wire diameter, 8mm spacing clip type fastener grill with metal logo plate
- 总长1.3米伸缩杆，配十字拉伸底座
Totally 1.3meter adjustable pole, with cross wrought iron crust base
- 新款大角度四铝叶
Brand new big 4 aluminum blade
- 适合于空间特大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in super ample factories, workshops, warehouses and hall, etc.
- 500mm/650mm/750mm
20" / 26" / 30"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



液晶屏幕电机
LED screen motor

Remote
Control

技术参数 Technical parameters

规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
20"/500mm	110/220/380	1/3	50/60	130-150	1350	160	73
26"/650mm	110/220/380	1/3	50/60	180-220	1350	180	80
30"/750mm	110/220/380	1/3	50/60	260-300	1350	250	86

规格 Size	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
20"/500mm	16.5	18.5	57.5*18.5*80	300	590	740	580	1170	1470
26"/650mm	18.5	20.5	74*19*72	275	530	670	480	960	1220
30"/750mm	19.5	21.5	81.5*19*82	220	425	536	420	850	1070



新款子弹头生铁圆形机壳
new-design bullet shape
round cast iron motor housing

铝牙箱铁齿轮
aluminum gear box
and iron gear wheel

电木开关
bakelite switch

新款铝板大三叶
new-design big 3
aluminum blade

2.0mm线径8mm间距
16根扁线自扣网
2.0mm wire diameter and
8mm wire spacing ,16 pcs ,
clip type fastener grill

1.3米伸缩杆
1.3m adjustable pole

7公斤十字铸铁底座
7kgs cross iron base

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
Three speed options
- 新款子弹头圆形铸铁机壳，铝牙箱
New-design bullet shape round cast iron motor housing , with aluminum gear box
- 2.0mm线径16根扁线自扣网罩
2.0mm wire diameter clip type fastener grill, 16 pieces of wire, applied to national standard.
- 总长1.3米伸缩杆，配7.0公斤十字铸铁底座
Totally 1.3meter adjustable pole, with 7.0kgs cross iron base
- 新款大角度三铝叶
New-design big-angle 3 aluminum blade
- 适合于空间特大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in super ample factories, workshops, warehouses and hall, etc.
- 500mm/650mm/750mm
20" / 26" / 30"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



新款子弹头电机
new bullet shape motor

超广角送风
ULTRA WIDE
ANGLE

技术参数 Technical parameters

规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
20"/500mm	110/220/380	1/3	50/60	130-150	1350	160	73
26"/650mm	110/220/380	1/3	50/60	180-220	1350	180	80
30"/750mm	110/220/380	1/3	50/60	260-300	1350	250	86

规格 Size	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
20"/500mm	16.5	18.5	57.5*18.5*80	300	590	740	580	1170	1470
26"/650mm	18.5	20.5	74*19*72	275	530	670	480	960	1220
30"/750mm	19.5	21.5	81.5*19*82	220	425	536	420	850	1070



功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
Three speed options
- 80mm铸铁前壳配前后花篮，铝牙箱
80mm round cast iron motor housing, with aluminum gear box
- 2.0mm线径扁线自扣网，10mm间距
2.0mm wire diameter, 10mm spacing clip type fastener grill
- 总长1.3米伸缩杆，配10.0公斤十字铸铁底座
Totally 1.3meter adjustable pole, with 10.0kgs cross iron base
- 大角度三铝叶
Big-angle 3 aluminum blade
- 适合于空间特大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in super ample factories, workshops, warehouses and hall, etc.
- 850mm
34"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



技术参数 Technical parameters

规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
34"/850mm	110/220	1/3	50/60	50/60	1350	350	80

规格 Size	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
34"/850mm	26.5	28.5	-	-	-	-	290	590	740



功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速，带拉绳开关盒
Three speed options, with thread control
- 传统拉伸壳电机设计，铝牙箱铁齿轮
Traditional-design round wrought iron crust motor, aluminum gear box and iron gear wheel
- 新款D型密网（扁线自扣网，网罩线径：1.8mm2）网罩更为紧密稳固
New D-type dense grill(clip type, wire diameter:1.8mm2)more tight and stable than the old design
- 铁弯杆配拉伸下接
Bent pipe with wrought iron crust connector
- 三铝叶
3 optimized aluminum blade
- 适合于空间较大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in larger factories, workshops, warehouses and hall, etc.
- 500mm/600mm/650mm/750mm
20"/24"/26"/30"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



技术参数 Technical parameters

规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
20"/500mm	110/220	1/3	50/60	100-135	1350	170	73
24"/600mm	110/220	1/3	50/60	140-180	1350	175	80
26"/650mm	110/220	1/3	50/60	160-200	1350	205	76
30"/750mm	110/220	1/3	50/60	200-260	1350	290	86

规格 Size	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
20"/500mm	11.5	13	58*18*59	315	678	976	770	1540	1940
24"/600mm	12	13.5	68*5*18.5*68.5	310	620	781	685	1380	1730
26"/650mm	12.5	14	74*19*72	275	530	670	600	1210	1530
30"/750mm	13.5	15	81.7*18*81.7	220	425	536	520	1040	1310



FLW-500/600/650/750-D (500/600/650/750mm)



60mm生铁圆形机壳
60mm round cast iron
motor housing



铝牙箱塑料齿轮
aluminum gear box
and plastic gear wheel



电木开关
bakelite switch



二铝叶
2 blades



1.8mm线径10mm间距
12根 扁线自扣网
1.8mm wire diameter and
10mm wire spacing, 12 pcs,
clip type fastener grill



弯杆配生铁接头
bent pipe with cast
iron connector

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
Three speed options
- 60mm铸铁前壳，内配前后花篮，铝牙箱
60mm cast iron motor housing and cast iron inside, with aluminum gear box
- 1.8mm线径，10mm间距 扁线自扣网罩
1.8mm wire diameter, and spacing 10mm clip type fastener grill
- 生铁下接弯杆
Bent pipe with cast iron connector
- 二铝叶
2 optimized aluminum blade
- 适合于空间较大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in larger factories, workshops, warehouses and hall, etc.
- 500mm/600mm/650mm/750mm
20" /24" /26" /30"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



大功率电机
big power motor



技术参数 Technical parameters

规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
20"/500mm	110/220/380	1/3	50/60	100-135	1350	170	73
24"/600mm	110/220/380	1/3	50/60	140-180	1350	175	80
26"/650mm	110/220/380	1/3	50/60	160-200	1350	205	76
30"/750mm	110/220/380	1/3	50/60	200-260	1350	290	86

规格 Size	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
20"/500mm	11.5	13	58*18*59	315	678	976	770	1540	1940
24"/600mm	12	13.5	68*5*18.5*68.5	310	620	781	685	1380	1730
26"/650mm	12.5	14	74*19*72	275	530	670	600	1210	1530
30"/750mm	13.5	15	81.7*18*81.7	220	425	536	520	1040	1310

FLW-500/650/750-E (500/650/750mm)



新款方型电机配前后花篮
new type as square
motor housing



铝牙箱塑料齿轮
aluminum gear box
and plastic gear wheel



电木开关
bakelite switch



新款前网装饰环
grand new decorative
panel for front grill



大角度四铝叶
big-angle 4
aluminum blade



2.0mm线径10mm间距
12根新款扁线自扣网
2.0mm wire diameter and
10mm wire spacing, 12 pcs,
new clip type fastener grill



弯杆配生铁接头
bent pipe with cast
iron connector

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 四档调速
Four speed options
- 方形拉伸壳，内配前后花篮，铝牙箱
Square wrought iron crust motor housing and cast iron inside, with aluminum gear box
- 新款A型2.0mm线径，10mm间距扁线自扣网罩
New A-type 2.0mm wire diameter, and spacing 10mm new type clip type fastener grill
- 生铁下接弯杆
Bent pipe with cast iron connector
- 大角度4铝叶 (专利号：201130410753.7)
Big-angle 4 aluminum blade, with patent (Patent NO.: 201130410753.7)
- 适合于空间特大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in super ample factories, workshops, warehouses and hall, etc.
- 500mm/650mm/750mm
20" /26" /30"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



大功率电机
big power motor



技术参数 Technical parameters

规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
20"/500mm	110/220/380	1/3	50/60	100-135	1350	170	73
26"/650mm	110/220/380	1/3	50/60	160-200	1350	205	80
30"/750mm	110/220/380	1/3	50/60	200-260	1350	290	86

规格 Size	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
20"/500mm	11.5	13	57*17*57.5	450	900	1080	770	1540	1940
26"/650mm	12.5	14	74*19*72	275	530	624	600	1210	1530
30"/750mm	13.5	15	81.7*18*81.7	220	425	536	520	1040	1310



新款子弹头生铁圆形机壳
new-design bullet shape
round cast iron motor housing and iron gear wheel



铝牙箱铁齿轮
aluminum gear box



电木开关
bakelite switch



新款铝板大三叶
new-design big 3
aluminum blade



2.0mm线径8mm间距
16根扁线自扣网
2.0mm wire diameter and
8mm wire spacing, 16 pcs,
clip type fastener grill



弯杆配生铁接头
bent pipe with cast
iron connector

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
Three speed options
- 新款子弹头圆形铸铁机壳，铝牙箱
New-design bullet shape round cast iron motor housing, with aluminum gear box
- 2.0mm线径16根国标扁线自扣网罩
2.0mm wire diameter clip type fastener grill, 16 pieces of wire, applied to national standard.
- 带铸铁接头弯杆，配三角板
Bent pipe with cast iron connector, then with triangle
- 新款大角度三铝叶
New-design big-angle 3 aluminum blade
- 适合于空间特大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in super ample factories, workshops, warehouses and hall, etc.
- 500mm/650mm/750mm
20" / 26" / 30"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



新款子弹头电机
new bullet shape motor



超广角送风
ULTRA WIDE
ANGLE

技术参数 Technical parameters

规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
20"/500mm	110/220/380	1/3	50/60	100-135	1350	170	73
24"/600mm	110/220/380	1/3	50/60	140-180	1350	175	76
26"/650mm	110/220/380	1/3	50/60	160-200	1350	205	80
30"/750mm	110/220/380	1/3	50/60	200-260	1350	290	86

规格 Size	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
20"/500mm	11.5	13	57*17*57.5	450	900	1080	770	1540	1940
24"/500mm	12	13.5	68.5*18.5*68.5	310	643	780	685	1380	1730
26"/650mm	12.5	14	74*19*72	275	530	670	600	1210	1530
30"/750mm	13.5	15	81.7*18*81.7	220	425	536	520	1040	1310




新款带液晶显示屏控制盒
New design LCD screen
control box



多功能遥控
Multifunctional
remote control



大角度四铝叶
Big angle
4 aluminum blade



2.0mm线径10mm间距
12根 金属扁线自扣网
2.0mm wire diameter and
10mm wire spacing, 12pcs,
clip type fastener grill with
metal logo plate



弯杆配生铁接头
bent pipe with cast
iron connector

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 19档调速
Nineteen speed options
- 新款液晶屏幕控制盒，带触控键控制功能，并附带遥控
New-design LCD screen control box with touch key function, and comes with remote control
- 新款2.0mm线径扁线自扣网，10mm间距，金属商标牌
New 2.0mm wire diameter, 10mm spacing clip type fastener grill with metal logo plate
- 带铸铁接头弯杆，配三角板
Bent pipe with cast iron connector, then with triangle
- 新款大角度四铝叶
Brand new big angle 4 aluminum blade
- 适合于空间特大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in super ample factories, workshops, warehouses and hall, etc.
- 500mm/650mm/750mm
20" / 26" / 30"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise




Remote
Control









技术参数 Technical parameters

规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
20"/500mm	110/220/380	1/3	50/60	100-135	1350	170	73
26"/650mm	110/220/380	1/3	50/60	160-200	1350	205	80
30"/750mm	110/220/380	1/3	50/60	200-260	1350	290	86

规格 Size	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
20"/500mm	11.5	13	57*17*57.5	450	900	1080	770	1540	1940
26"/650mm	12.5	14	74*19*72	275	530	624	600	1210	1530
30"/750mm	13.5	15	81.7*18*81.7	220	425	536	520	1040	1310

部件 Parts	机壳 Motor housing	牙箱 Gear box	转定子 Rotor & stator	开关 Switch	电容 Capacity	轴承 Bearing	电源线 power cord
市场上 普遍配置 generally configuration in market	 无防锈处理 no rust prevention	 回收塑料牙箱 recycling plastic gear box	 0.8mm厚手冲片, 无叶转子 0.8mm thickness manually stamping, without leaf blade	 塑料开关 plastic switch	 低容量电容 low capacity	 6003滚珠轴承 6003 ball bearing	 铝芯 aluminum wire
我司配置 (标配) our standard configuration	 防锈电镀处理 antirust plating processing	 防爆塑料牙箱 bran-new plastic gear box	 0.5mm厚自动冲 片, 带叶转子 0.5mm thickness automatically stamping, with leaf blade	 不带认证电木开关 bakelite switch	 带认证 capacity with approval	 6202滚珠轴承 6202 ball bearing	 铜芯 copper wire
我司配置 (高配) our high standard configuraiton	 铸铁壳 cast iron	 铝牙箱或铁牙箱 aluminum or iron gear box	 0.5mm厚自动冲 片, 带叶转子 0.5mm thickness automatically stamping, with leaf blade	 带认证电木开关 bakelite switch with approval	 带认证 capacity with approval	 6203滚珠轴承 6203 ball bearing	 带认证铜芯 copper wire, power cord with approval

部件 Parts	电机上接头 top connector of motor	电机下接头 bottom connector of motor	网罩商标环 decorative panel of front grill	网扣 Fastener	网罩 Grill	杆 Pole	底板 Base
市场上 普遍配置 generally configuration in market	 拉伸接头 wrought iron crust connector	 拉伸接头 wrought iron crust connector	 铁牌 iron decorative panel	 单爪网扣 single-chuck screw fastener	 1.2mm圆线网 1.2mm wire diameter screw type	 0.4mm壁厚, 870mm高直杆 0.4mm thickness, 870mm fix pole	 5kg橡胶底座 5kgs rubber base
我司配置 (标配) our standard configuration	 生铁接头 cast iron connector	 生铁接头 cast iron connector	 新款塑料装饰环 own new-design plastic decorative panel	 全新紧固式网扣/ 双爪式网扣 latest tight type/ double-chuck type fastener	 2.0mm圆线网 2.0mm wire diameter screw type	 0.7mm壁厚, 1050mm高直杆 0.7mm thickness, 1050mm fix pole	 7.5kgs橡胶底座 7.5kgs rubber base
我司配置 (高配) our high standard configuraiton	 豪华上接头 cast iron connector	 豪华下接头 cast iron connector	 新款塑料/不锈钢装饰环 own new-design plastic/stainless steel decorative panel	 自扣 clip type	 2.0mm线径 国标扁线自扣网 1.2mm wire diameter clip type fastener grill, national standard	 伸缩杆 adjustable pole	 十字铸铁底座或拉伸底座 cross iron base or cross wrought iron base

部件 Parts	选择 Choice						
电机 Motor	 风叶状 新款拉伸 圆形机壳 new type of round wrought iron crust motor housing	 水滴状 拉伸圆形 机壳配前后花篮 round wrought iron crust motor housing	 子弹头铸铁机壳 bullet shape cast iron	 新款散热型机壳 new type ribbed cast iron motor housing	 60mm生铁圆形 机壳(可配内拉伸) 60mm round cast iron motor housing(wrought iron crust is alternative)	 80mm生铁 圆形机壳 80mm round cast iron motor housing	 新款方型电机 配前后花篮 new type as square motor housing
	1. motor wire : ● copper ● aluminium 2. length of power cord:						
风叶 Blades	 二铝叶 2 aluminum blades	 三塑叶 3 plastic blades	 三铝叶 3 aluminum blades	 新款大三铝叶 New-design big 3 aluminum blades	 四铝叶 4 aluminum blades		
网罩 Grill	 1.6mm线径,13mm间距 12根新款螺丝网 1.6mm wire diameter, 13mm spacing, 12 pcs screw type grill	 1.8mm线径10mm间距 12根 扁线自扣网 1.8mm wire diameter and 10mm wire spacing, 12 pcs , clip type fastener grill	 1.8mm线径10mm间距 12根新款螺丝网 1.8mm wire diameter and 10mm wire spacing, 12 pcs, new screw type grill	 1.8mm线径10mm间距 12根新款扁线自扣网 1.8mm wire diameter and 10mm wire spacing, 12 pcs , new clip type fastener grill	 2.0mm线径10mm间距 12根扁线自扣网 electroplated 2.0mm wire diameter and 10mm wire spacing, 12 pcs, clip type fastener grill		
	 2.0mm线径10mm间距 12根新款扁线自扣网 2.0mm wire diameter and 10mm wire spacing , 12 pcs , new clip type fastener grill	 2.0mm线径10mm间距 新款扁线自扣网罩配金 属商标装饰环 2.0mm wire diameter and 10mm wire spacing , 12 pcs , new clip type fastener grill with grand metal logo plate	 2.0mm线径新款放射型 3环扁线自扣网罩 2.0mm wire diameter, tricyclic type radial fastener grill	 圆标2.0mm线径8mm 间距16根加密扁线自扣网 2.0mm wire diameter and 8mm wire spacing , 16 pcs , clip type fastener grill, applied to national standard	 圆标2.0mm线径8mm 间距24支根扁线自扣网 2.0mm wire diameter and 8mm wire spacing , 24 pcs , lip type fastener grill, applied to national standard		
	Coating: ● powder coating ● electroplating(zinc or chrome)						

部件 Parts						
杆 Pipe						
	93cm拉伸接头直杆 93cm fixed pole	105cm拉伸接头直杆 105cm fixed pole	105cm生铁下接头直杆 105cm fixed pole with cast iron connector	1.3米伸缩杆 1.3m adjustable pole	1.6米伸缩杆 1.6m adjustable pole	
底板 Base						
	5公斤圆橡胶底座 5kgs round rubber base	5.5公斤新款 圆橡胶底座 5.5kgs new round rubber base	7.5公斤新款 圆橡胶底座 7.5kgs new round rubber base	5.5/7公斤十字橡胶 底座 5.5/7kgs cross rubber base	6公斤十字拉伸铁底 6 kgs cross wrought iron crust base(iron cover ,rubber inside)	7公斤/10公斤 十字铸铁底座 7kgs/10kgs cross iron base
弯杆 Bent pipe (wall fan accessory)						
	弯杆配生铁接头 bent pipe with cast iron connector		弯杆配生铁接头 (51cm或81cm) bent pipe with cast iron connector(51cm or 81cm)		弯杆配拉伸接头 bent pipe without cast iron connector	
调节螺丝 Adjusting screw						
	过载器 overload protection			摇摆粒 oscillation adjusting screw		
牙箱 Gear box						
	全新防爆塑料牙箱 new material plastic gear box	塑料牙箱铁齿轮 plastic gear box and iron gear wheel	铝牙箱塑料齿轮 aluminum gear box and plastic gear wheel	铝牙箱铁齿轮 aluminum gear box and iron gear wheel	铁牙箱塑料齿轮 iron gear box and plastic gear wheel	铁牙箱铁齿轮 iron gear box and iron gear wheel



功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
Three speed options
- 传统电机设计，拉伸电机内配生铁前后花篮或者生铁电机，利于电机散热
Traditional design round motor, or cast iron motor better for heat releasing
- 密网 (2.0mm网罩线径)
Dense grill(2.0mm wire dia.)
- 1.0mm厚直杆
1.0mm thickness Fixed pole
- 三铝叶
3 optimized aluminum blade
- 喷雾有效范围：2-10米
Spray effective distance:2-10m
- 摇摆角度：90度
Fan oscillation adjustable: 90 degrees automatically
- 可利用空间：30-50平方米内
Available area: 30-50 square meters
- 工作温度：20 - 80 °C
Operation Temperature: 20 - 80 °C
- 工作环境湿度：20% - 85%
Operation Humidity: 20% - 85%
- 水箱容量：48升
Tank Capacity: 48L
- 适合于空间较大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in larger factories, workshops, warehouses and hall, etc.
- 水箱形状：方形水箱 (颜色: 黑色或白色)
Water tank: Square water tank (Color: Black / White)
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



技术参数 Technical parameters

型号 Model	规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
FL-650F-1	26"/650mm	110/220	1/3	50/60	140-180	1350	180	80
FL-750F-1	30"/750mm	110/220	1/3	50/60	160-200	1350	250	86

型号 Model	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
FL-650F-1	21.5KGS	24.0KGS	-	-	-	-	170	360	470
FL-750F-1	22.5KGS	25.0KGS	-	-	-	-	150	310	400



功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
Three speed options
- 传统电机设计，拉伸电机内配生铁前后花篮或者生铁电机，利于电机散热
Traditional design round motor, cast iron motor better for heat releasing
- 密网 (2.0mm网罩线径)
Dense grill(2.0mm wire dia.)
- 1.0mm厚直杆
1.0mm thickness Fixed pole
- 三铝叶
3 optimized aluminum blade
- 喷雾有效范围：2-10米
Spray effective distance:2-10m
- 摇摆角度：90度
Fan oscillation adjustable: 90 degrees automatically
- 可利用空间：30-50平方米内
Available area: 30-50 square meters
- 工作温度：20 - 80 °C
Operation Temperature: 20 - 80 °C
- 工作环境湿度：20% - 85%
Operation Humidity: 20% - 85%
- 水箱容量：29升
Tank Capacity: 29L
- 适合于空间较大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in larger factories, workshops, warehouses and hall, etc.
- 水箱形状：椭圆水箱 (颜色：黑色或蓝色)
Water tank: Ooval water tank (Color: Black / Blue)
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



技术参数 Technical parameters

型号 Model	规格 Size	电压 Voltage/V	相数 Phase	赫兹 HZ	功率 Power/W	转速 r/min	风量 M3/min	噪音 Db(A)
FL-650F-2	26"/650mm	110/220	1/3	50/60	140-180	1350	180	80
FL-750F-2	30"/750mm	110/220	1/3	50/60	160-200	1350	250	86

型号 Model	净重 N.W.	毛重 G.W.	单台装CBU(1PC/CTN)				散件装SKD		
			Means	20GP	40GP	40HQ	20GP	40GP	40HQ
FL-650F-2	23.0KGS	25.0KGS	-	-	-	-	150	300	340
FL-750F-2	24.0KGS	26.0KGS	-	-	-	-	140	280	320

我司配置 GD-FEILU

认证水泵
pump with CE approval



认证航空插
aviation plug
with CE approval



水泵对比
contrast of pumps



带刹脚轮
wheels with brake



普通配置 Normal

不带认证水泵
pump without approval



普通航空插
aviation plug
without approval



不带刹脚轮
wheels
without brake



航空插公插对比
contrast of male aviation plugs



航空插母插对比
contrast of female aviation plugs



FL-450/500-A
(450/500mm)



新款拉伸圆形机壳
new type of round
wrought iron crust
motor housing

同步电机
synchronous motor

牛角叶
3 aluminum blade

1.8mm扁线自扣网
1.6mm wire diameter
clip type fastener grill

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
Three speed options
- 新款圆形拉伸电机
Latest round wrought iron crust motor
- 1.8mm扁线自扣网，间距10mm
1.8mm clip type fastener grill, spacing: 10mm
- 伸缩杆，配圆形旋纹底板
Adjustable pipe with round rubber base
- 牛角叶
3 aluminum blade
- 适合于空间较大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in larger factories, workshops, warehouses and hall, etc.
- 450mm/500mm
18" / 20"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



大功率电机
big power motor



FL-450/500-B
(450/500mm)



水滴状 拉伸圆形机壳配前后花篮
round wrought iron crust motor housing

同步电机
synchronous motor

b-型新款前网装饰环
b-type latest-design decorative panel for front grill

大角度海棠叶
big-angle aluminum blade

450mm 4叶
450mm
4 aluminum blade

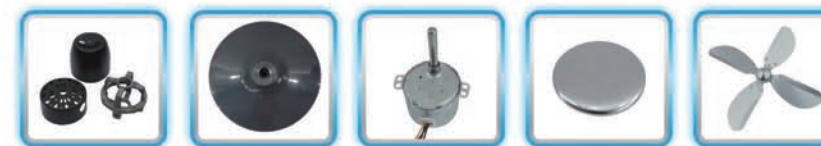
新款商业底座
new base of commercial base

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
Three speed options
- 圆形拉伸电机
Round wrought iron crust motor
- 1.8mm扁线自扣网
1.8mm clip type fastener grill
- 伸缩杆，配新款豪华塑料底板
Adjustable pipe with grand round rubber base
- 大角度海棠叶
Big-angle aluminum blade
- 适合于空间特大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in super ample factories, workshops, warehouses and hall, etc.
- 450mm/500mm
18" / 20"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



大功率电机
big power motor



水滴状 拉伸圆形机壳配前后花篮
round wrought iron crust motor housing

新款圆形底座
latest-design round plastic base

同步电机
synchronous motor

b-型新款前网装饰环
b-type latest-design decorative panel for front grill

大角度4铝叶
big-angle
4 aluminum blade

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
3 Variable fan speed
- 新的设计风格和专利
New design style & patent
- 大角度4铝叶
4 Blades with soft wind
- 新款仿古造型12根，2.0mm线径喷粉扁线自扣网
Latest-design antique clip type fastener grill, 12pcs, 2.0mm wire diameter
- 高度可调
Adjustable height
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



大功率电机
big power motor



FLW-450/500-A 工业挂壁扇
Industrial Wall Fan



水滴状 拉伸圆形机壳配前后花篮
round wrought iron crust motor housing

同步电机
synchronous motor

新款前网装饰环
grand new decorative panel for front grill

大角度海棠叶
big-angle aluminum blade

功能介绍 Introduction To Functions

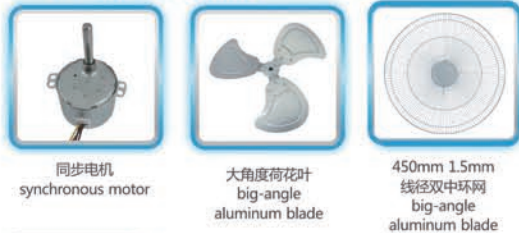
- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
Three speed options
- 1.8mm扁线自扣网
1.8mm clip type fastener grill
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise
- 圆形拉伸电机，配前后花篮
Round wrought iron crust motor, with cast iron inside
- 弯杆配拉伸接头，以及三角板
Bent pipe with wrought iron crust connector and triangle
- 大角度海棠叶
Big-angle aluminum blade
- 适合于空间特大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in super ample factories, workshops, warehouses and hall, etc.



大功率电机
big power motor



FL-450/500M-1 (450/500mm)



同步电机
synchronous motor

大角度荷花叶
big-angle
aluminum blade

450mm 1.5mm
线径双中网
big-angle
aluminum blade

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
3 Variable fan speeds
- 新的设计风格和专利
New design style & patent
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise
- 大角度3或4叶片 (尺寸:450mm/500mm可选)
3 or 4 Blades with soft wind (Size: 18" & 20")
- 高度可调
Adjustable height




大电机
big motor

技术参数 Technical parameters

型号 Model	电压 Voltage/V	功率 Power/W	转速 r/min	包装尺寸 Means	单台装CBU(1PC/CTN)
FL-450M-1/2	110-127V/ 220-240V	135W	1350	79*19.5*51.5 cm	280PCS /20GP 584PCS/40GP 870PCS/40HQ
FL-500M-1	110-127V 220V/50HZ	140W	1350	84.5*19.5*57.0 cm	243PCS/20GP 504PCS/40GP 717PCS/40HQ

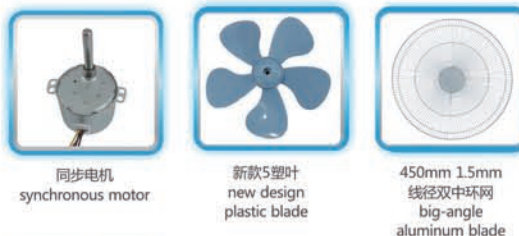FL-450M-2(450mm)



同步电机
synchronous motor

新款5塑叶
new design
plastic blade

450mm 1.5mm
线径双中网
big-angle
aluminum blade

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 三档调速
3 Variable fan speeds
- 新的设计风格和专利
New design style & patent
- 高度可调
Adjustable height
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise
- 新款5塑叶
New design plastic blade with soft wind and quietly



大电机
big motor



新款前网装饰环
grand new decorative
panel for front grill

豪华型中控面板(带定时)
high-class control
panel (with timer)

大电机
big motor


功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 4档可变速风扇
4 Variable fan speeds
- 三叶片
3 Blades with soft wind
- 高度可调
Adjustable height
- 新的设计风格和专利
New design style & patent
- 豪华型带60分钟定时
With control panel (60 Minutes timer)
- 450mm/500mm
18" /20"
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise

技术参数 Technical parameters

型号 Model	电压 Voltage/V	功率 Power/W	转速 r/min	包装尺寸 Means	单台装CBU(1PC/CTN)
FL-450M	110-127V/ 220-240V	135W	1350	57*30*58cm	218PCS /20GP 524PCS/40GP 795PCS/40HQ
FL-500M	110-127V/ 220V/50HZ	140W	1350	58*32*58 cm	198PCS/20GP 459PCS/40GP 720PCS/40HQ

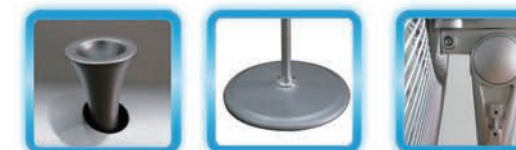FL-450/500S-1 (450/500mm)



功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 3档可变速风扇
3 variable fan speeds
- 三叶片
3 blades with soft wind
- 性能良好，外观美好，超静音。
Have good performance, nice appearance, ultra-silence.
- 广泛应用于家庭，办公室，商场，等场所。
It's widely used in house, offices, malls, etc..
- 高度可调
Adjustable height
- 风扇俯仰角度可调
Adjustable pitch angle
- 新的设计风格和专利
New design style & patent

技术参数 Technical parameters

型号 Model	电压 Voltage/V	功率 Power/W	转速 r/min
FL-450/500S-1	110-127V/220-240V	60/70W	1300



小电机
small motor

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 3档可变速风扇
3 variable fan speeds
- 16"(400mm)四叶片
16" 4 blades with soft wind
- 性能良好，外观美好，超静音。
Has good performance, nice-appearance, ultra-silent.
- 广泛应用于家庭，办公室，商场，等场所。
It's widely used in house, offices, malls, etc..
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



小电机
small motor



技术参数 Technical parameters

型号 Model	电压 Voltage/V	功率 Power/W	转速 r/min	装柜量 1PC/CTN
FL-400S/S-1	110-127V/ 220-240V	75W	1300	370PCS/20GP 772PCS/40GP 1152PCS/40HQ

FLW-450/500-A (450/500mm)



同步电机
synchronous motor

新款前网装饰环
grand new decorative
panel for front grill

荷花叶
3 aluminum blade

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 3档可变速风扇
3 Variable fan speeds
- 新的设计风格和专利
New design style&patent
- 吸引的颜色组合
Attractive colour combinations
- 带线控盒子，便于使用
With thread control part, easy to use
- 3叶片
3 Blades with soft wind
- 1.5线径双中环网罩
1.5mm wire diameter spiral type grill
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



大功率电机
big power motor



技术参数 Technical parameters

型号 Model	电压 Voltage/V	功率 Power/W	转速 r/min	包装尺寸 Means	双台装 CBU(2PCS/CTN)
FLW-450-A/B	110-127V/ 220-240V	130W	1400	51*45*51.5 cm	438PCS / 20GP 896PCS / 40GP 1130PCS / 40HQ
FLW-500-A/B	110-127V/ 220-240V	140W	1400	57*45*57.5 cm	352PCS / 20GP 718PCS / 40GP 908PCS / 40HQ

FLW-400/450/500-B (400/450/500mm)



同步电机
synchronous motor

新款前网装饰环
grand new decorative
panel for front grill

荷花叶
3 aluminum blade

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 3档可变速风扇
Three speed options by switch
- 荷花叶
3 aluminum blade
- 400mm/450mm/500mm
16" / 18" / 20"
- 适合于空间较大的工厂、车间、仓库、会场等场所
Suitable for cooling the temperature in larger factories, workshops, warehouses and hall, etc.
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



小电机
small motor



FLW-450/500-C (450/500mm)



同步电机
synchronous motor

大电机
big motor

功能介绍 Introduction To Functions

- 耐用，低噪音，高效高速电机，100%全铜电机，纯铜电源线，高速自动冲压转定子片，优质散热效果。
Durable and low-noisy, effectively high velocity motor, 100% copper wire. Pure copper wire power cord, high-velocity automatically pressing stator and rotor, excellent effect on heat dissipation
- 3档可变速风扇
3 Variable fan speeds
- 新的设计风格和专利
New design style&patent
- 吸引的颜色组合
Attractive colour combinations
- 带线控盒子，便于使用
With thread control part, easy to use
- 3叶片
3 Blades with soft wind
- 1.5线径双中环网罩
1.5mm wire diameter spiral type grill
- 风扇轴承采用美国美孚润滑油，高密度加厚轴承钢，使电机经久耐用，强风低噪
Adopt the American Mobil oil in our fan bearing, high density upset bearing steel, to make our motor much more durable, high-velocity and low-noise



大功率电机
big power motor



技术参数 Technical parameters

型号 Model	电压 Voltage/V	功率 Power/W	转速 r/min	包装尺寸 Means	双台装 CBU(2PCS/CTN)
FLW-450-C	110-127V/ 220-240V	135W	1400	56*35.5*51.5 cm	480PCS / 20GP 1008PCS / 40GP 1176PCS / 40HQ
FLW-500-C	110-127V/ 220V/50HZ	140W	1400	57.5*35.5*57.5 cm	342PCS / 20GP 840PCS / 40GP 1120PCS / 40HQ